


# SUCTION STRAINER - SE



- REUSABLE STAINLESS STEEL 100 MESH / 149 MICRON STANDARD
- NYLON NUT
- STEEL CAP / SUPPORT TUBE
- CONTINUOUS EPOXY BOND
- MAX. WORKING TEMP. 80° C.
- SUITABLE FOR HYDRAULIC / MINERAL OIL
- CONSULT FACTORY -FOR WATER APPLICATION
- FLEXIBLE MAGNETIC WRAP AVAILABLE

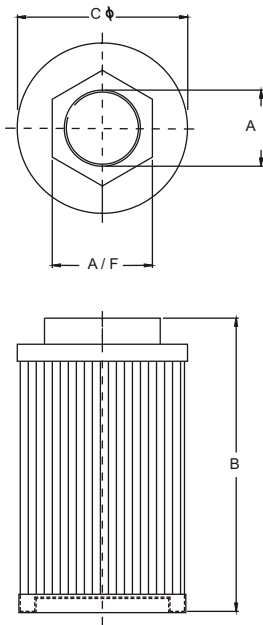

MODEL NO	FLOW LPM	THREAD IN. BSPP A	OVERALL LENGTH B	DIA NUT CAP C	NUT A/F	SCREEN AREA (SQ. CMS)	WT KGS	MAGNET WRAP
SE - 005	20	1 / 2	79	68	25	400	0.20	1
SE - 007	30	3 / 4	91	68	36	438	0.20	2
SE - 010	40	1	137	68	41	710	0.30	2
SE - 020	80	1 - 1 / 4	175	85	50	1045	0.45	2
SE - 030	120	1 - 1 / 2	206	85	59	1451	0.55	2
SE - 050	200	1 - 1 / 2	254	102	70	2193	0.65	2
SE - 051	200	2	254	102	70	2193	0.80	2
SE - 075	300	2 - 1 / 2	259	131	85	2580	1.05	3
SE - 100	400	3	300	131	96	3225	1.36	3

## MODEL CODE : ASSEMBLY

SE	- 010	- **	- **	- **	- **	- **
SERIES	SIZE	PORT THDS. SIZE	PORT THDS. CONNECTION	MICRONS. OPTIONAL #	FEATURE. SPECIAL 1	FEATURE. SPECIAL 2
		REFER TABLE OMIT IF STD	<b>B-BSPP</b> - STD  <b>N-NPT</b> - OPTIONAL	<b>149</b> - SS 100 MESH STD <b>125</b> - SS 120 MESH <b>100</b> - SS 150 MESH <b>074</b> - SS 200 MESH <b>063</b> - SS 250 MESH Also - 30 / 60 MESH	<b>R B 3</b> - 3 PSI ByPass  Optional	<b>M</b> - Magnet Wrap  Optional

OMIT IF STANDARAD

CONSULT FACTORY, FOR OPTIONAL / SPECIAL FEATURE

(Dimensions / Model Nos Revised W E F Oct 08 )